

AUTOMATIC PAD PRINTER SERIES CONTACT LENS PAD PRINTING 全自动移印机系列-美瞳移印机



▲ 印刷系统 Printing System



▲ 下料系统 Unloading System



产品特点 STANDARD FEATURES

- 采用PLC加触摸屏操控, 功能参数灵活设置, 便于操作人员调试和管理;
- 采用自动上下料系统, 快速准确, 减少人力, 提高自动化程度;
- 除尘系统采用SP离子风棒处理工件表面;
- 采用机械手自动输送工作台, 运行平稳, 定位精准;
- 独立的胶头上下行程和速度调节, 便于定位;
- 采用密封式油墨上墨系统, 节省油墨量, 干净环保;
- 可以印刷不同颜色和图案, 满足多样化的市场需求;
- 采用精密气动元件和电磁阀, 确保产品的优良品质。
- Adopting PLC and touch screen control, flexible setting of functional parameters, easy for operators to debug and manage.
- Adopting an automatic loading and unloading system, fast and accurate, reducing manpower, and improving automation level.
- The dust removal system adopts SP ion air rod to treat the surface of the workpiece.
- Using a robotic arm to automatically transport the workbench, it runs smoothly and has precise positioning.
- Independent rubber head up and down stroke and speed adjustment for easy positioning.
- Adopting a sealed ink cup ink system, saving ink volume, clean and environmentally friendly.
- Can print different colors and patterns to meet diverse market demands.
- Using precision pneumatic components and solenoid valves to ensure excellent product quality.


规格参数 SPECIFICATION PARAMETERS

上下行程 / Up And Down Itinerary	0~150mm	重量 / Weight	470kg
前后行程 / Front And Back Travel	0~200mm	机器尺寸 / Machine Dimensions	2000 X 1400 X 2000mm
钢板尺寸 / Steel Plate Size	100×200×10mm	气压 / Air Pressure	6~8bar
印刷速度 / Printing Speed	1500~1800Pcs/hr	功率 / Power	1.5kW

AUTOMATIC PAD PRINTER SERIES ROTARY PAD PRINTING 全自动移印机系列-转盘移印机

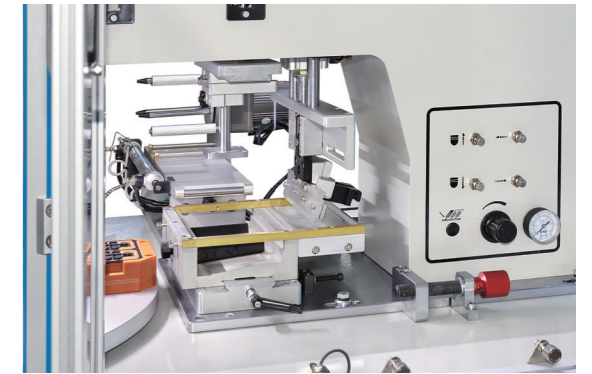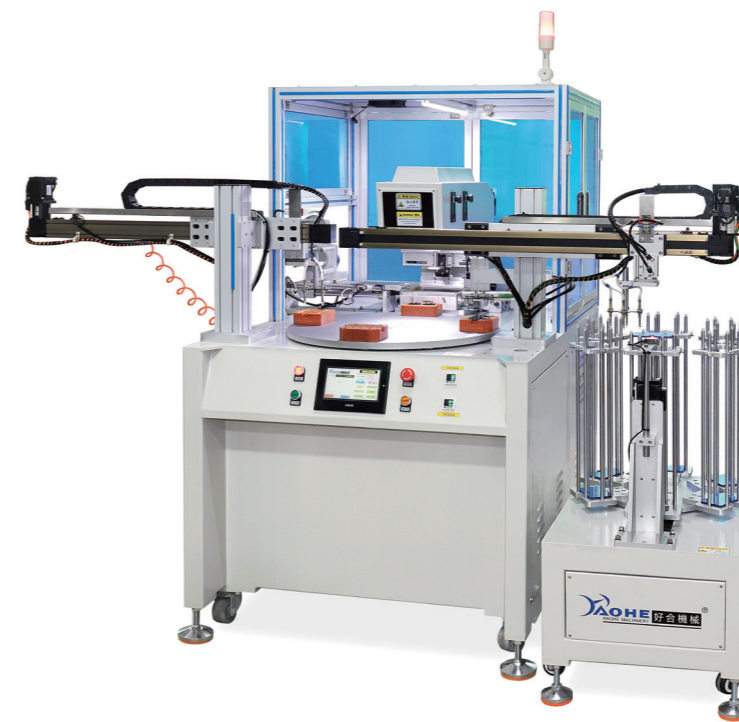

▲ 印刷系统 Printing System

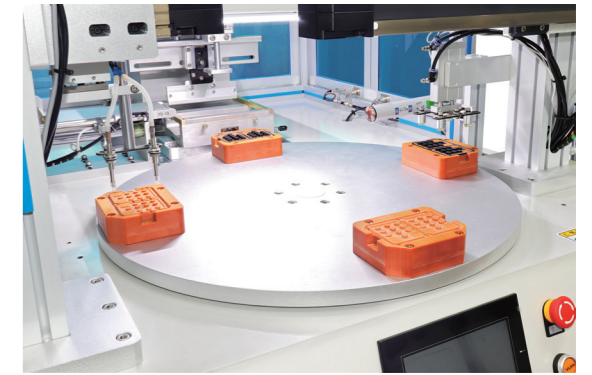

▲ 转盘工作台 Rotary Table Workbench

产品特点 STANDARD FEATURES

- 适合按键, PVC胶片, 镜片, 卡类等平面产品的印刷;
- 采用PLC控制系统及触摸屏操控, 设置灵活, 操作方便;
- 自动提升上料器及机械手上料, 快速准确, 减少人力;
- 配备离子风棒除尘装置及机械手压料装置, 方便快捷;
- 采用多工位转盘工作台, 精密分割器驱动, 运行平稳, 定位精准;
- 上墨方式可选用密封式油墨或敞开式墨盘, 配备自动清胶装置;
- 采用机械手自动卸料, 确保了印刷的连续与稳定, 提高自动化程度;
- 采用精密气动元件和电磁阀, 确保产品的优良品质。
- Suitable for printing flat products such as buttons, PVC film, lenses, cards, etc.
- Adopting PLC control system and touch screen operation, flexible settings and convenient operation.
- Automatic lifting feeder and robotic arm feeding, fast and accurate, reducing manpower.
- Equipped with ion air rod dust removal device and mechanical arm material pressing device, convenient and fast.
- Adopting a multi station precision turning table, it runs smoothly and has precise positioning.
- The ink can be applied using a sealed ink cup or open tray, equipped with an automatic cleaning device.
- Using a robotic arm for automatic unloading ensures continuous and stable printing, improving the level of automation.
- Using precision pneumatic components and solenoid valves to ensure excellent product quality.

规格参数 SPECIFICATION PARAMETERS

型号 / Model	HH-300S/A	重量 / Weight	280kg
圆盘尺寸 / Disk Size	650mm	机器尺寸 / Machine Dimensions	2090 X 1438 X 1686mm
钢板尺寸 / Steel Plate Size	100×150mm	气压 / Air Pressure	6~8bar
印刷速度 / Printing Speed	800~1000Pcs/hr	功率 / Power	1.75kW