

## STANDARD PAD PRINTER SERIES 标准移印机系列

### ONE COLOR 单色机型



### TWO COLORS 双色机型 C穿梭款



### TWO COLORS 双色机型 A输送带款



### 产品特点 STANDARD FEATURES

- 适合文具、玩具、礼品、电器、电子等产品中图案的单色或双色套色印刷；
- 微电脑板按键控制各项功能动作，运行速度快，操作简单；
- 独立的胶头前后、上下行程与速度调节，粘墨、印刷等待时间可调节；
- 油墨底座、工作台可多功能X、Y、R轴调节，使印刷定位准确；
- 可选油盆或密封式油盅上墨，刮墨干净，环保省墨；
- 双色机配备精准的穿梭或输送带工作台，特殊减震装置，机器运作非常平稳；
- 采用精密气动元件和电磁阀，确保产品的优良品质；
- 标准配置及进口配置可选，可加装安全防护罩、热风及胶头清洁装置；
- 整机气动、电子元件保修一年，终身维护。
- Suitable for one color or two colors printing of patterns in stationery, toys, gifts, appliances, electronics, and other products.
- The microcomputer board controls various functional actions with buttons, ensuring fast operation speed and simple operation.
- Independent rubber head front and back, up and down stroke and speed adjustment, adjustable ink sticking and printing waiting time.
- The ink base and workbench can be adjusted for multiple X, Y, and R axes, ensuring accurate printing positioning.
- Optional open tray or sealed ink cup for ink application, clean and environmentally friendly ink saving.
- The two color machine is equipped with precise shuttle or conveyor belt workbenches, special shock absorption devices, Smooth operation.
- Using precision pneumatic components and solenoid valves to ensure excellent product quality.
- Standard and imported configurations are optional, and safety protection covers, hot air, and rubber head cleaning devices can be added.
- The pneumatic and electronic components of the entire machine are guaranteed for one year, with lifelong maintenance.


## 规格参数 SPECIFICATION PARAMETERS

型号 Model	HS-125		HM-160		HL-200		HL-250		
可印刷颜色数量 Number Of Printable Colors	1	2	1	2	1	2	1	2	
C 穿梭工作台 Shuttle Workbench	-	✓	-	✓	-	✓	-	✓	
A 输送带工作台 Conveyor Belt Workbench	-	✓	-	✓	-	✓	-	✓	
前后气缸行程 (mm) Front And Rear Cylinder Stroke (mm)	125	125	160	160	200	200	250	250	
重量 (kg) Weight (kg)	68	C 78 A 90	98	C 108 A 138	150	C 170 A 200	180	C 200 A 230	
机器尺寸 (mm) Machine Dimensions (mm)	1/C2 A2	460 X 680 X 1400	510 X 800 X 1450	1050 X 800 X 1450	600 X 1000 X 1500	1100 X 850 X 1500	650 X 1050 X 1500	1150 X 900 X 1500	
气压 (bar) Air Pressure (bar)	5-7								
电源 Power Supply	110V/220V 60/50Hz 40W								
可加装安全防护罩 Can Be Equipped With Safety Protective Covers	✓	✓	✓	✓	✓	✓	✓	✓	
可加装热风烘干 Can Be Equipped With Hot Air Drying	✓	✓	✓	✓	✓	✓	✓	✓	
可加装胶头清洁装置 Can Be Equipped With Adhesive Heads For Cleaning	✓	✓	✓	✓	✓	✓	✓	✓	
油盆机 Open Tray Machine	钢板尺寸 (mm) Steel Plate Size (mm)	100×100	100×100	150×100	150×100	200×100	200×100	250×100	250×100
	最大印刷面积 (mm) Maximum printing area (mm)	80×80	80×80	80×130	80×130	80×180	80×180	80×230	80×230
油盅机 Ink Cup Machine	最大印刷速度 (pcs/hr) Maximum Printing Speed (pcs/hr)	2600	C 1600 A 1800	1800	C 1400 A 1600	1400	C 1200 A 1400	1200	C 1000 A 1200
	钢板尺寸 (mm) Steel Plate Size (mm)	200×100	200×100	250×100	250×100	300×100	300×100	350×100	350×100
油盅机 Ink Cup Machine	最大印刷速度 (pcs/hr) Maximum Printing Speed (pcs/hr)	2600	C 1500 A 1600	1800	C 1300 A 1400	1400	C 1100 A 1200	1200	C 900 A 1000
	油盅机配置标准 Ink Cup Machine Configuration Standard	Ø90mm油盅, 配合4"×8"钢板, 最大印刷面积Ø75mm Ø90mm ink cup, matched with 4" x 8" steel plate, with a maximum printing area of Ø75mm							

\* "C"为穿梭工作台系列, "A"为输送带工作台系列。"C" represents the shuttle workbench series, "A" represents the conveyor belt workbench series.



▲ 油盆结构 Open Tray Structure

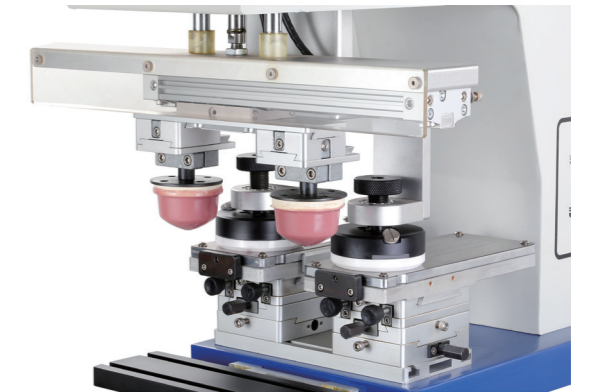

▲ 油盅结构 Ink Cup Structure