

STANDARD PAD PRINTER SERIES 标准移印机系列

FOUR COLORS 四色机型 A 输送带款



FOUR COLORS 四色机型 C 穿梭款



SIX COLORS 六色机型 C 穿梭款




产品特点 STANDARD FEATURES

- 适合文具、玩具、礼品、电器、电子等产品中图案的单色或多色套色印刷；
- 微电脑按键或触摸屏控制各项功能动作，运行速度快，操作简单；
- 独立的胶头前后、上下行程与速度调节，粘墨、印刷等待时间可调节；
- 油墨底座、工作台可多功能X、Y、R轴调节，使印刷定位准确；
- 可选油盆或密封式油盅上墨，刮墨干净，环保省墨；
- 配备精准的伺服穿梭或输送带工作台，特殊减震装置，机器运作非常平稳；
- 采用精密气动元件和电磁阀，确保产品的优良品质；
- 标准配置及进口配置可选，可加装安全防护罩、热风及胶头清洁装置；
- 整机气动、电子元件保修一年，终身维护。
- Suitable for one color or many colors printing of patterns in stationery, toys, gifts, appliances, electronics, and other products.
- Microcomputer board buttons or touch screen control various functional actions, fast running speed, simple operation.
- Independent rubber head front and back, up and down stroke and speed adjustment, adjustable ink sticking and printing waiting time.
- The ink base and workbench can be adjusted for multiple X, Y, and R axes, ensuring accurate printing positioning.
- Optional open tray or sealed ink cup for ink application, clean and environmentally friendly ink saving.
- Equipped with precise servo shuttle or conveyor belt workbenches and special shock absorbers, the machine operates very smoothly.
- Using precision pneumatic components and solenoid valves to ensure excellent product quality.
- Standard and imported configurations are optional, and safety protection covers, hot air, and rubber head cleaning devices can be added.
- The pneumatic and electronic components of the entire machine are guaranteed for one year, with lifelong maintenance.

规格参数 SPECIFICATION PARAMETERS

型号 Model	HM-160		HL-200			HL-250			
可印刷颜色数量 Number Of Printable Colors	4	6	4	6	8	4	6	8	
C 穿梭工作台 Shuttle Workbench	✓	✓	✓	✓	✓	✓	✓	✓	
A 输送带工作台 Conveyor Belt Workbench	✓	✓	✓	✓	✓	✓	✓	✓	
前后气缸行程 (mm) Front And Rear Cylinder Stroke (mm)	160	160	200	200	200	250	250	250	
重量 (kg) Weight (kg)	C 135 A 158	160 188	195 220	250 280	320 350	260 290	320 350	380 420	
机器尺寸 (mm) Machine Dimensions (mm)	C 980 X 830 X 1450 A 1050 X 830 X 1450		1020 X 880 X 1500	1100 X 1150 X 1500	1100X1050X1500 1550X1180X1580	1150 X 1050 X 1500	1200X1150X1500	1600X1280X1580	
气压 (bar) Air Pressure (bar)	5-7								
电源 Power Supply	110V/220V 60/50Hz 40W								
可加装安全防护罩 Can Be Equipped With Safety Protective Covers	✓	✓	✓	✓	✓	✓	✓	✓	
可加装热风烘干 Can Be Equipped With Hot Air Drying	✓	✓	✓	✓	✓	✓	✓	✓	
可加装胶头清洁装置 Can Be Equipped With Adhesive Heads For Cleaning	✓	✓	✓	✓	✓	✓	✓	✓	
油盅机 Ink Cup Machine	钢板尺寸 (mm) Steel Plate Size (mm)	150×100	150×100	200×100	200×100	200×100	250×100	250×100	250×100
	最大印刷面积 (mm) Maximum printing area (mm)	80×130	80×130	80×180	80×180	80×180	80×230	80×230	80×230
	最大印刷速度 (pcs/hr) Maximum Printing Speed (pcs/hr)	C 900 A 1200	700 1000	800 1100	600 900	400 700	700 1000	500 800	300 600
油盆机 Ink Tray Machine	钢板尺寸 (mm) Steel Plate Size (mm)	250×100	250×100	300×100	300×100	300×100	350×100	350×100	350×100
	最大印刷速度 (pcs/hr) Maximum Printing Speed (pcs/hr)	C 900 A 1200	700 1000	800 1100	600 900	400 700	700 1000	500 800	300 600
	油盅机配置标准 Ink Cup Machine Configuration Standard	Ø90mm油盅, 配合4"×8"钢板, 最大印刷面积Ø75mm Ø90mm ink cup, matched with 4"×8" steel plate, with a maximum printing area of Ø75mm							

* "C"为穿梭工作台系列, "A"为输送带工作台系列。"C" represents the shuttle workbench series, "A" represents the conveyor belt workbench series.

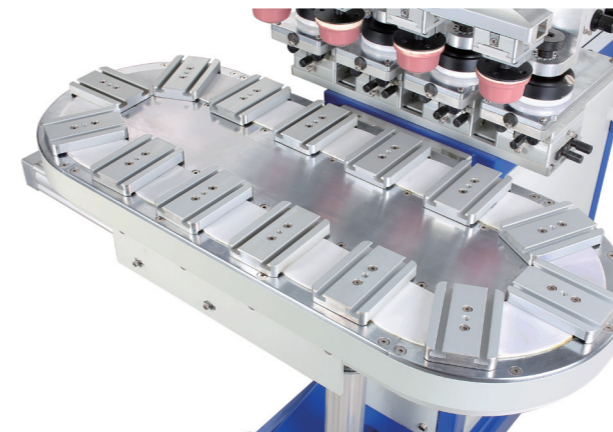

▲ 输送带工作台 Conveyor Belt Workbench



▲ 穿梭工作台 Shuttle Workbench