

## CUSTOMIZED PAD PRINTING MACHINE SERIES ROTARY TABLE WORKBENCH 非标移印机系列-转盘移印机



▲ 印刷系统 Printing System



▲ 转盘工作台 Rotary Table Workbench

### 产品特点 STANDARD FEATURES

- 适合文具、玩具、礼品、电器、电子等产品中图案的单色多工位印刷；
- 采用PLC触摸屏操控，功能参数灵活设置，便于操作人员调试和管理；
- 采用横刮式油盅，配合多印头组，实现一出多印刷模式；
- 采用转盘分割器多工位工作台，精密分割器驱动，运行平稳，定位准确；
- 独立的胶头前后、上下行程与速度调节，粘墨、印刷等待时间可调节；
- 采用机械手自动下料，减少人力，高效快速；
- 可加装安全防护罩、热风装置、胶头清洁装置；
- 采用精密气动元件和电磁阀，确保产品的优良品质。
- Suitable for monochrome multi station printing of patterns in stationery, toys, gifts, appliances, electronics and other products.
- Adopting PLC and touch screen control, flexible setting of functional parameters, easy for operators to debug and manage.
- Adopting a horizontal scraping ink cup, combined with multiple print head groups, to achieve one out multiple printing modes.
- Adopting a multi station precision turning table, running smoothly and positioning accurately.
- Independent rubber head front and back, up and down stroke and speed adjustment, adjustable ink sticking and printing waiting time.
- Adopting a robotic arm for automatic cutting, reducing manpower and achieving high efficiency and speed.
- Can be equipped with safety protection cover, hot air device, and rubber head cleaning device.
- Using precision pneumatic components and solenoid valves to ensure excellent product quality.


### 规格参数 SPECIFICATION PARAMETERS

型号 / Model	HH-400S-J	印刷速度 / Printing Speed	800~1000Pcs/hr
上下行程 / Up And Down Itinerary	0~75mm	重量 / Weight	500kg
前后行程 / Front And Back Travel	0~160mm	机器尺寸 / Machine Dimensions	1500 X 1295 X 1265mm
横刮行程 / Horizontal Scraping Stroke	0~450mm	气压 / Air Pressure	6~8bar
油盅尺寸 / Ink Cup Size	Ø90mm	功率 / Power	0.75kW

## CUSTOMIZED PAD PRINTING MACHINE SERIES TANK WITH WORKBENCH 非标移印机系列-坦克带移印机



▲ 印刷系统 Printing System

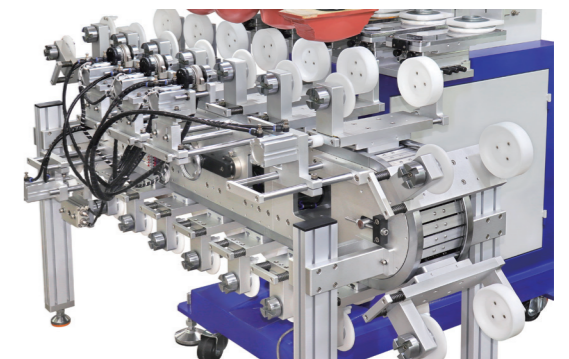

▲ 坦克带工作台 Tank With Workbench

### 产品特点 STANDARD FEATURES

- 适合文具、玩具、礼品、电器、电子等产品中图案的多色套色印刷；
- 采用PLC触摸屏操控，功能参数灵活设置，便于操作人员调试和管理；
- 独立的胶头前后、上下行程与速度调节，粘墨、印刷等待时间可调节；
- 油墨底座多功能X、Y、R轴调节，使印刷定位准确；
- 可选油盆或密封式油盅上墨，刮墨干净，环保省墨；
- 采用坦克带输送工作台，精密分割器驱动，运行平稳，定位准确；
- 可加装安全防护罩、热风装置、胶头清洁装置；
- 采用精密气动元件和电磁阀，确保产品的优良品质。
- Suitable for multi-color printing of patterns in stationery, toys, gifts, appliances, electronics, and other products.
- Adopting PLC and touch screen control, flexible setting of functional parameters, easy for operators to debug and manage.
- Independent glue head front and back, up and down stroke and speed adjustment, adjustable ink sticking and printing waiting time.
- The multifunctional X, Y, and R axis adjustment of the ink base ensures accurate printing positioning.
- Optional open tray or sealed ink cup for ink application, clean ink scraping, environmentally friendly and ink saving.
- Adopting a multi station precision turning table, it runs smoothly and has accurate positioning.
- Can be equipped with safety protection cover, hot air device, and rubber head cleaning device.
- Using precision pneumatic components and solenoid valves to ensure excellent product quality.

### 规格参数 SPECIFICATION PARAMETERS

型号 / Model	HL-300T-5	印刷速度 / Printing Speed	900~1000Pcs/hr
上下行程 / Up And Down Itinerary	0~80mm	重量 / Weight	450kg
前后行程 / Front And Back Travel	0~200mm	机器尺寸 / Machine Dimensions	1740 X 1350 X 1520mm
钢板尺寸 / Steel Plate Size	125×300×10mm	气压 / Air Pressure	6~8bar
油盅尺寸 / Ink Cup Size	Ø110×120mm	功率 / Power	0.35kW